


Application: on boxed and tubular sections, on sheet-metal and non-metal sheets.
Assembly: by specific manual, pneumatic, oleopneumatic or electric tools.

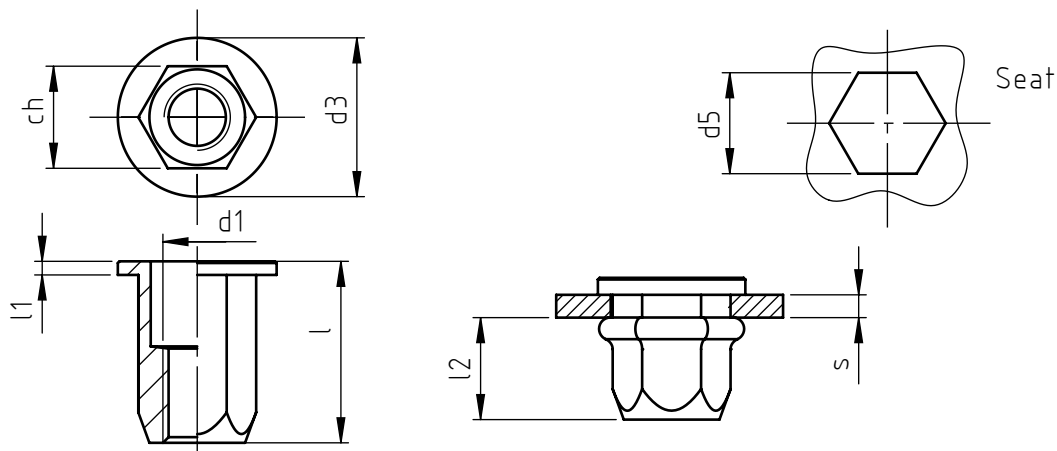

code	material		s grip range	l	d1 6H	ch	d3	l1	d5 +0,15 0	l2 *	UNI reference
**10448A1/M 3/_	8	--	0,5 ÷ 2,0	10	M 3	5	8	0,8	5	6	-
**10448B1/M 3/_	8	--	2,0 ÷ 3,5	11							-
10448A1/M 4/_	8	X	0,5 ÷ 2,0	10,5	M 4	6	9	0,8	6	6,5	11969/48A1/M 4/_
10448B1/M 4/_	8	X	2,0 ÷ 4,0	12,5							11969/48B1/M 4/_
10448A1/M 5/_	8	X	0,5 ÷ 2,5	12,5	M 5	7	10	1	7	7	11969/48A1/M 5/_
10448B1/M 5/_	8	X	2,5 ÷ 4,5	14,5							11969/48B1/M 5/_
10448A1/M 6/_	8	X	0,5 ÷ 3,0	16	M 6	9	12	1,2	9	9,5	11969/48A1/M 6/_
10448B1/M 6/_	8	X	3,0 ÷ 5,5	18,5							11969/48B1/M 6/_
10448A1/M 8/_	8	X	0,5 ÷ 3,5	17	M 8	11	14	1,3	11	9,5	11969/48A1/M 8/_
10448B1/M 8/_	8	X	3,5 ÷ 6,0	19,5							11969/48B1/M 8/_
10448A1/M10/_	8	X	0,5 ÷ 3,5	21,5	M10	13	17	1,7	13	12,5	11969/48A1/M 10/_
10448B1/M10/_	8	X	3,5 ÷ 6,0	24							11969/48B1/M 10/_

Non binding dimensions, expressed in mm.

* Dimension measured on average thickness. Variable according to "s" dimension.

** Not included in UNI standard.

Standard

On demand

Not manufactured

Standard ref.: UNI 11969

Material: steel no.1.0303
stainless steel no. 1.4567

Finishing: steel: zinc-plated
stainless steel: natural

Tolerances: according to UNI standards EN 22768-1

Thread: ISO 6 H metric

Example: threaded nut, cylindrical head,
hexagonal shank, stainless steel,
grip 2,0 mm, M 6 thread:

10448A1/M 6/X - UNI reference 11969/48A1/M 6/X

_____/_____/8
_____/_____/X

