


Applications: thermoplastic materials.
Assembly: by pressure through expansion anchorage.

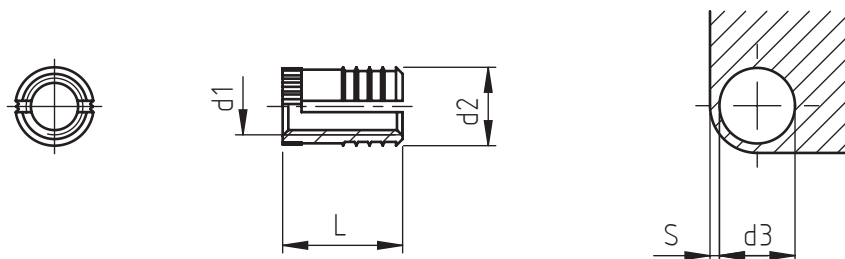

code	metric thread	external diameter	total length	number of vanes	minimum wall thickness	hole diameter
	d1	d2	L	n°	S	d3 +0,04/-0
812 0020.80	M 2	3,45	4,0	2	1,6	3,2
813 0025.80	M 2,5	4,3	4,8	3	2,0	4,0
813 0030.80	M 3	4,3	4,8	3	2,0	4,0
813 0035.80	M 3,5	5,1	6,4	3	2,4	4,8
814 0040.80	M 4	5,9	8,0	4	2,8	5,6
815 0050.80	M 5	6,7	9,5	5	3,2	6,4
815 0060.80	M 6	8,3	12,7	5	4,0	8,0
815 0080.80	M 8	9,9	12,7	5	4,8	9,5

Non binding dimensions, expressed in mm.

For a correct usage of the product it is advisable to carry out some preliminary assembling tests to determine the correct hole diameter.

Standard

On demand

Not manufactured

Material: brass
Finishing: natural
Tolerances: ISO 2768 - m
Threading d1: ISO 6 H metric
Example: insert B-lok, M5 thread, brass:

815 0050.80

