Applications: thermoplastic and fibrous materials.
Assembly: by pressure through expansion anchorage.

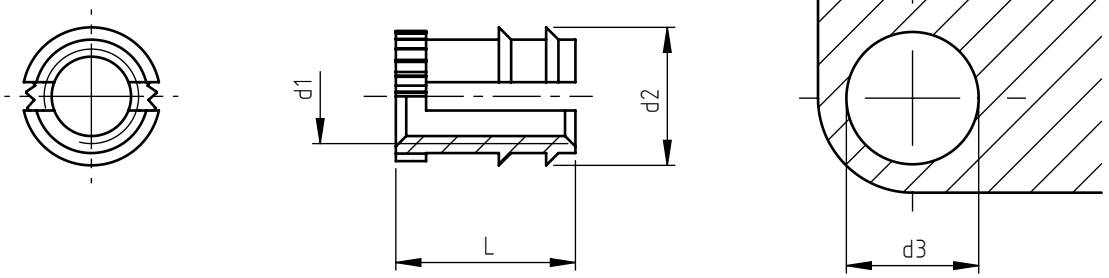

code	metric thread d1	external diameter d2	total length L	number of vanes n°	diameter hole d3
821 0030.80	M 3	5,35	4,8	1	4,5 ÷ 4,7
822 0040.80	M 4	6,65	9,5	2	5,8 ÷ 6,0
822 0050.80	M 5	7,35	9,5	2	6,5 ÷ 6,7
822 0060.80	M 6	9,05	9,5	2	8,2 ÷ 8,4
823 0080.80	M 8	12,45	14,3	3	11,8 ÷ 12,0

Non binding dimensions, expressed in mm.

For a correct usage of the product it is advisable to carry out some preliminary assembling tests to determine the correct hole diameter.

Standard On demand -- Not manufactured

Material: brass
Finishing: natural
Tolerances: ISO 2768 - m
d1 thread: ISO 6H metric
Example: brass B-Lok threaded insert, with vanes M5 thread

822 0050.80



SPECIALINSERT®, COMMITS ITSELF TO CONTINUOUSLY IMPROVE ITS PRODUCTS. IT RESERVES THE RIGHT TO CHANGE THEIR TECHNICAL AND STRUCTURAL CHARACTERISTICS WITHOUT PRIOR NOTICE.
ALL RIGHTS ARE RESERVED AND THE DUPLICATE, EVEN PARTIAL, OF THESE DOCUMENTS, AS WELL AS ITS DISTRIBUTION TO THIRD PARTIES, ARE FORBIDDEN, UNLESS OTHERWISE AND EXPRESSLY AUTHORIZED BY SPECIALINSERT.

specialinsert®
www.specialinsert.it - export@specialinsert.it

Headquarter and Export department:
Via Monfalcone 144 - 10136 - Torino - IT - Tel. +39.011.700301 - Fax +39.011.702947
Milan branch:
Via E.Cialdini 37 - 20126 - Milano - IT - Tel. +39.02.646.8476 - Fax +39.02.662.00275
Production and purchase departments:
Via E. Pavanello 1 - 30030 - Maerne di Martellago (Venezia) - IT - Tel. +39.041.503.0100
Fax +39.041.503.0110