THREADED TUBULAR RIVET NUTS
LOW PROFILE HEAD
ROUND CLOSE-END SHANK

Deform - nut
series 9206
UNI 11968 compliant

Application: on boxed and tubular sections, on sheet-metal and non-metal sheets.
Assembly: by specific manual, pneumatic, oleopneumatic or eletric tools.

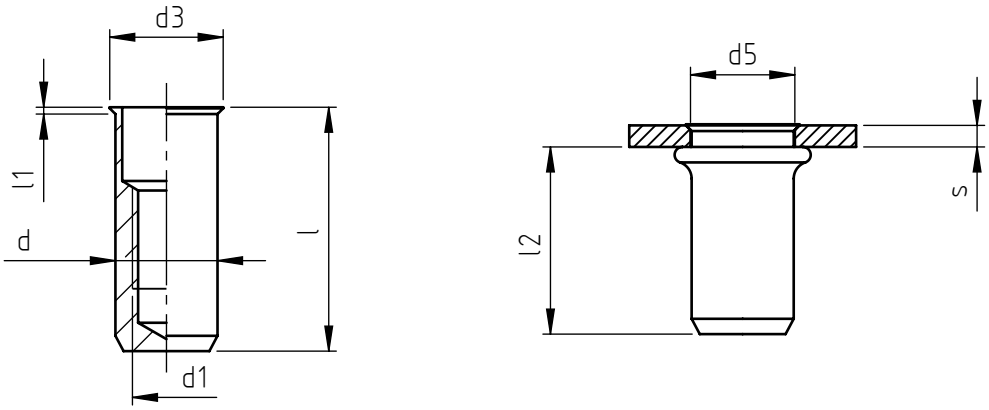

code	material				s grip range	l	d1 6H	d	d3	l1 ~	d5 +0,15 0	l2 *	UNI reference
9206A/M 3/__	8	8S	X	--	0,5 ÷ 2,0	12,5	M 3	5	5,5	0,35	5	9,5	11968/06A/M 3/__
9206B/M 3/__	8	8S	X	--	2,0 ÷ 3,5	14							11968/06B/M 3/__
9206A/M 4/__	8	8S	X	XS	0,5 ÷ 2,0	14,5	M 4	6	6,75	0,5	6	11	11968/06A/M 4/__
9206B/M 4/__	8	8S	X	XS	2,0 ÷ 4,0	16,5							11968/06B/M 4/__
9206A/M 5/__	8	8S	X	XS	0,5 ÷ 2,5	17,5	M 5	7	8	0,6	7	12,5	11968/06A/M 5/__
9206B/M 5/__	8	8S	X	XS	2,5 ÷ 4,5	19,5							11968/06B/M 5/__
9206A/M 6/__	8	8S	X	XS	0,5 ÷ 3,0	21,5	M 6	9	10	0,6	9	16	11968/06A/M 6/__
9206B/M 6/__	8	8S	X	XS	3,0 ÷ 5,5	24							11968/06B/M 6/__
9206A/M 8/__	8	8S	X	XS	0,5 ÷ 3,5	24	M 8	11	12	0,6	11	17,5	11968/06A/M 8/__
9206B/M 8/__	8	8S	X	XS	3,5 ÷ 6,0	26,5							11968/06B/M 8/__
9206A/M10/__	8	8S	X	XS	0,5 ÷ 3,5	29	M10	13	14,5	0,85	13	21,5	11968/06A/M 10/__
9206B/M10/__	8	8S	X	XS	3,5 ÷ 6,0	31,5							11968/06B/M 10/__
9206A/M12/__	8	--	X	--	0,5 ÷ 3,5	34,5	M12	15	16,5	0,85	15	27,5	11968/06A/M 12/__
9206B/M12/__	8	--	X	--	3,5 ÷ 6,5	37,5							11968/06B/M 12/__

Non binding dimensions, expressed in mm.
* Dimension measured on average thickness.Variable according to "s" dimension.

Standard On demand -- Not manufactured

Stadard ref.: UNI 11968
Material: steel nr.1.0718 _____/___/8
steel nr.1.0303 _____/___/8S
stainless steel nr.1.4305 _____/___/X
stainless steel nr.1.4567 _____/___/XS
Finishing: steel: zinc-plated
stainless steel: natural
Tolerances: according to UNI standards EN 22768-1
Thread: ISO 6 H metric
Example: threaded tubular rivet nut, low profile head, round close-end shank, stainless steel, grip 2,0 mm, M 6 thread:

9206A/M 6/X - UNI reference 11968/06A/M 6/X

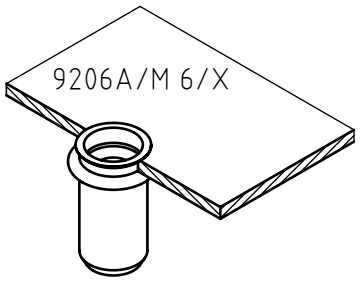

SPECIALINSERT COMMITS ITSELF TO CONTINUOUSLY IMPROVE ITS PRODUCTS. IT RESERVES THE RIGHT TO CHANGE THEIR TECHNICAL AND STRUCTURAL CHARACTERISTICS WITHOUT PRIOR NOTICE.
ALL RIGHTS ARE RESERVED AND THE DUPLICATE, EVEN PARTIAL, OF THESE DOCUMENTS, AS WELL AS ITS DISTRIBUTION TO THIRD PARTIES, ARE FORBIDDEN, UNLESS OTHERWISE AND EXPRESSLY AUTHORIZED BY SPECIALINSERT.

Df03

www.specialinsert.it - export@specialinsert.it

Headquarter and Export department:
Via Monfalcone 144 - 10136 - Turin - IT - Tel. +39.011.700301
Milan branch:
Via E.Cialdini 37 - 20161 - Milan - IT - Tel. +39.02.646.8476 -
Production and purchase departments:
Via E. Pavanello 1 - 30030 - Maerne di Martellago (Venice) - IT - Tel. +39.041.503.0100