


Application: on thermoplastic and thermosetting materials.
 Assembly: co-moulding.

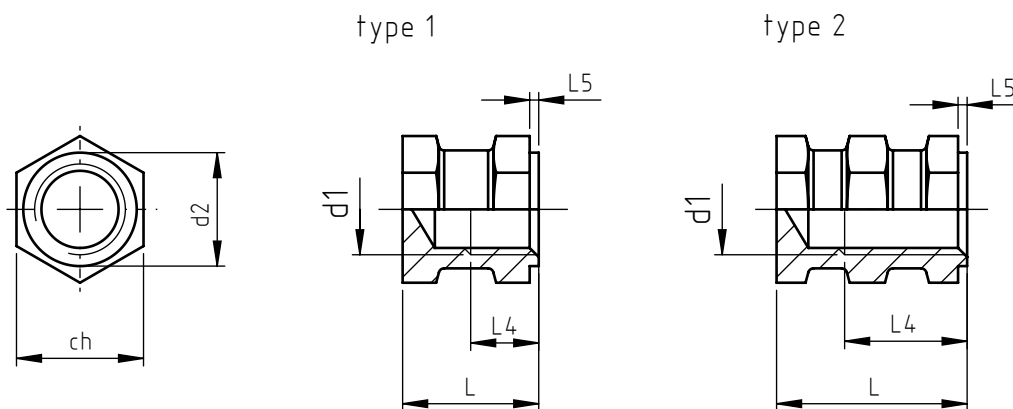

code	metric thread d1	hex key ch	total length L	external diameter d2	collar L5	minimum thread length L4	type
ES M3 H04.5 CH	M3	5	4,5	4	1	2,0	1
ES M3 H06 CH	M3	5	6	4	1	3,5	2
ES M4 H06 CH	M4	6	6	5,5	1	2,5	1
ES M4 H08 CH	M4	6	8	5,5	1	4,5	2
ES M5 H07.5 CH	M5	7	7,5	7	1	4,0	1
ES M5 H10 CH	M5	7	10	7	1	5,5	2
ES M6 H09 CH	M6	9	9	8	1	5,0	1
ES M6 H12 CH	M6	9	12	8	1	8,0	2
ES M8 H12 CH	M8	11	12	10	1	6,5	1
ES M8 H16 CH	M8	11	16	10	1	10,5	2
ES M10 H15 CH	M10	14	15	12,5	1	7,5	1
ES M10 H20 CH	M10	14	20	12,5	1	12,5	2

Non binding dimensions, expressed in mm.

Standard
 On demand
 Not manufactured

Material: brass
 Finishing: natural
 Tolerances: ISO 2768-m
 d1 thread: ISO 6H metric
 Example: blind brass hexagonal bush,
 M6 thread, 12 mm length:

ES M6 H12 CH

