
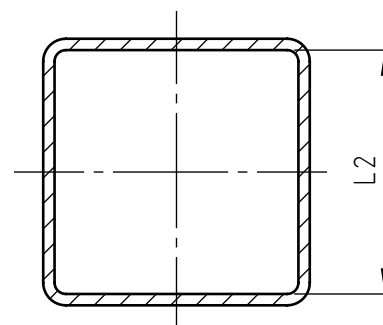



Application: at the end of square metallic and non-metallic tubes.  
Assembly: by pressure.



| code           | d1  | L2 *        | L1   | L    |
|----------------|-----|-------------|------|------|
| ITQ2S/M 6/15,7 | M 6 | 15,7 ÷ 17,1 | 18,3 | 11   |
| ITQ2S/M 6/18,9 |     | 18,9 ÷ 20,2 | 21,6 | 10   |
| ITQ2S/M 6/22,1 |     | 22,1 ÷ 23,4 | 24,3 | 10,5 |
| ITQ2S/M 6/26   |     | 26,0 ÷ 28,0 | 29,2 | 12   |
| ITQ2S/M 8/15,7 | M 8 | 15,7 ÷ 17,1 | 18   | 15   |
| ITQ2S/M 8/18,9 |     | 18,9 ÷ 20,2 | 21,4 | 14   |
| ITQ2S/M 8/22,1 |     | 22,1 ÷ 23,4 | 24,3 | 13,8 |
| ITQ2S/M 8/26   |     | 26,0 ÷ 28,0 | 29,1 | 16,2 |
| ITQ2S/M 8/32   |     | 32,0 ÷ 32,8 | 33,5 | 15   |
| ITQ2S/M 8/34,8 |     | 34,8 ÷ 36,1 | 37,4 | 17,3 |


Dimensions and images are not binding, expressed in mm.

Standard

On demand

Not manufactured

Material: steel  
Example: 2 crowns without flange insert for  
square tubes, M 6 thread, tube  
internal dimension 20x20 mm:  
ITQ2S/M 6/18,9



ITQ2S/M 6/18,9

\* For product definition, it is advisable to carry out assembly tests. For correct use, it is advisable to insert a locknut to secure the pin. The system is not suitable for structural loads. Following the insertion of the Crown-Nut, do avoid heat treatment, galvanic or other heating operations that could compromise the product's characteristics. The possible presence of cracks, due to the manufacturing process of deformation of the threaded assembly bush, is not to be considered as a defect and does not compromise the functionality of the Crown-Nut once installed.