FLANGE INSERT FOR THE INTERIOR OF ROUND TUBES

Crown - Nut
series ITT2T

Application: at the end of metallic and non-metallic tubes.
Assembly: by pressure.

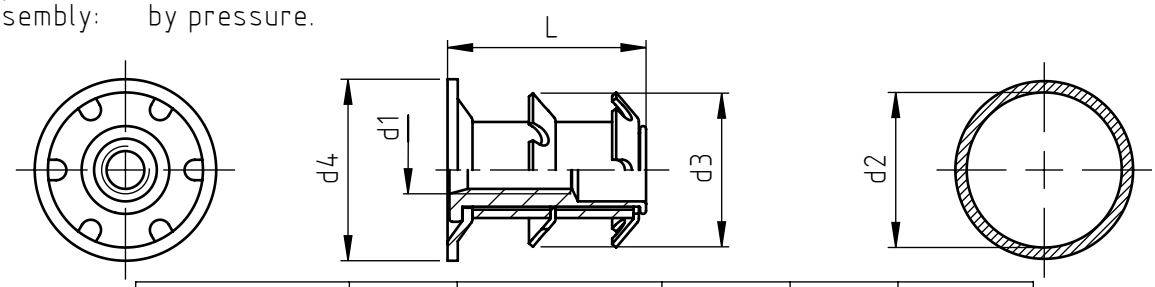

code	d1	d2 *	d3	L	d4
ITT2T/M 8/14,8	M 8	14,8 ÷ 16,1	17,0	26,0	19,0
ITT2T/M 8/16,4		16,4 ÷ 17,7	18,7		19,0
ITT2T/M 8/17,9		17,9 ÷ 19,3	19,7		22,0
ITT2T/M 8/18,9		18,9 ÷ 20,2	21,0		22,0
ITT2T/M 8/19,5		19,5 ÷ 20,9	21,6		22,0
ITT2T/M 8/21,4		21,4 ÷ 22,4	23,5		25,0
ITT2T/M 8/22,1		22,1 ÷ 23,4	24,6		25,0
ITT2T/M 8/22,7		22,7 ÷ 24,0	25,4		25,0
ITT2T/M 8/24,6		24,6 ÷ 25,6	26,5		28,0
ITT2T/M 8/25,3		25,3 ÷ 26,6	27,6		29,0
ITT2T/M 8/26/1		26,0 ÷ 28,0	28,9	28,5	30,0
ITT2T/M 8/28,4		28,4 ÷ 29,8	30,8	26,0	32,0
ITT2T/M 8/31,7		31,7 ÷ 32,9	33,7		35,0
ITT2T/M 8/34,8		34,8 ÷ 36,1	37,1		38,0
ITT2T/M 8/36		36,0 ÷ 38,0	39,0		40,0
ITT2T/M 8/56		56,0 ÷ 58,0	59,9		60,0
ITT2T/M10/17,9	M10	17,9 ÷ 19,3	19,7		22,0
ITT2T/M10/18,9		18,9 ÷ 20,2	21,6		22,0
ITT2T/M10/21,4		21,4 ÷ 22,4	23,5		25,0
ITT2T/M10/22,7		22,7 ÷ 24,0	25,4		25,0
ITT2T/M10/24,6		24,6 ÷ 25,6	26,5		28,0
ITT2T/M10/26		26,6 ÷ 27,6	28,2		30,1
ITT2T/M10/28,4		28,4 ÷ 29,8	30,8		32,0
ITT2T/M10/31,7		31,7 ÷ 32,9	33,7		35,0
ITT2T/M10/32,7		32,7 ÷ 33,9	35,0		38,0
ITT2T/M10/34,8		34,8 ÷ 36,1	37,1		38,0
ITT2T/M10/36		36,0 ÷ 38,0	39,0		40,0

Dimensions and images are not binding, expressed in mm.

Standard On demand Not manufactured

Material: steel
Example: 2 crowns flange insert for round tubes,
M 8 thread, internal diameter 20,5 mm: ITT2T/M 8/19,5



possible external dimension

* For product definition, it is advisable to carry out assembly tests. For correct use, it is advisable to insert a locknut to secure the pin. The head of the threaded bush may protrude from the flange, reinforced for technical necessity, varying the length L. Products with a flange are designed for use with feet or castors.The system is not suitable for structural loads. Following the insertion of the Crown-Nut, do avoid heat treatment, galvanic or other heating operations that could compromise the product's characteristics. The possible presence of cracks, due to the manufacturing process of deformation of the threaded assembly bush, is not to be considered as a defect and does not compromise the functionality of the Crown-Nut once installed.



ITT2T/M 8/19,5

SPECIALINSERT®. COMMITS ITSELF TO CONTINUOUSLY IMPROVE ITS PRODUCTS. IT RESERVES THE RIGHT TO CHANGE THEIR TECHNICAL AND STRUCTURAL CHARACTERISTICS WITHOUT PRIOR NOTICE.
ALL RIGHTS ARE RESERVED AND THE DUPLICATE, EVEN PARTIAL, OF THESE DOCUMENTS, AS WELL AS ITS DISTRIBUTION TO THIRD PARTIES, ARE FORBIDDEN, UNLESS OTHERWISE AND EXPRESSLY AUTHORIZED BY SPECIALINSERT®.

www.specialinsert.it - export@specialinsert.it

Headquarter and Export department:
Via Monfalcone 144 - 10136 - Turin - IT - Tel. +39.011.700301
Milan branch:
Via E.Cialdini 37 - 20161 - Milan - IT - Tel. +39.02.646.8476
Production and purchase departments:
Via E. Pavanello 1 - 30030 - Maerne di Martellago (Venice) - IT - Tel. +39.041.503.0100