


Application: on boxed and tubular sections, on sheet metal and non-metal sheets.
Assembly: by specific manual, pneumatic, oleopneumatic or electric tools.

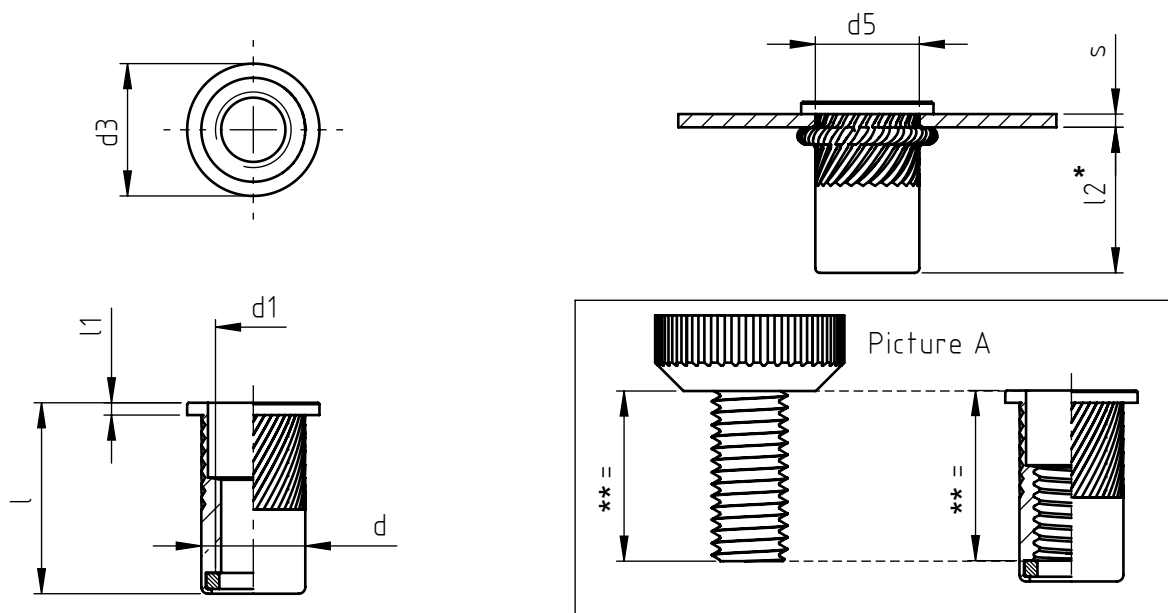

code	s grip range	l +0,50 -0,50	d1 6H	d	d3	l1	d5 +0,15 0	l2 *
TC/A M 5/_ZI	0,5 ÷ 3,0	18,5	M 5	9	12	1,2	9	15
TC/A/L M 5/_ZI	3,0 ÷ 5,5	21,0						
TC/A M 6/_ZI	0,5 ÷ 3,0	18,5	M 6	9	12	1,2	9	15
TC/A/L M 6/_ZI	3,0 ÷ 5,5	21,0						
TC/A M 8/_ZI	0,5 ÷ 3,5	20,1	M 8	11	14	1,3	11	15
TC/A/L M 8/_ZI	3,5 ÷ 6,0	22,6						
TC/A M 10/_ZI	0,5 ÷ 3,5	24,6	M 10	13	16	1,5	13	17
TC/A/L M 10/_ZI	3,5 ÷ 6,0	27,1						

Non binding dimensions, expressed in mm.

* Dimension measured on average thickness. Variable according to "s" dimension.

** The insert has to be screwed on the mandrel for the whole threaded length, avoiding screwing it into the nylon washer as shown in the picture (A) above.

 Standard

 On demand

Material: blind threaded nut steel no.1.0718 _____/_____/8ZI
blind threaded nut stainless steel no.1.4305 _____/_____/XZI

Finishing: washer: nylon
blind threaded nut steel: zinc-plated
blind threaded nut stainless steel: natural
washer: natural

Tolerances: according to UNI standards EN 2768-1

Thread: ISO 6 H metric

Example: threaded tubular self-locking rivet nut,
round head, knurled shank, in steel,
grip 3,0 mm, M 8 thread: TC/A M 8/8ZI

